

# Master STAGES™ CLEAN IP 2019s

## Silicated Low-foam Cleaner



Master STAGES™ CLEAN IP 2019s is a very low-foaming, liquid, cleaning concentrate designed to remove straight oils and coolants from steel, cast iron, and most aluminum parts.

### Spray



*By flooding parts with the chemical cleaner, spray cleaning offers a fast, effective way to remove soil, coolant, and oil residue from a variety of metals, and Master STAGES spray cleaners are specially tailored to do the job quickly, effectively, with less makeup, and no staining of parts. Master STAGES in-process spray cleaners are tough and fast-acting with very low V.O.C. and no SARA 313 reportable ingredients.*

*There's a Master STAGES spray cleaner specifically designed for cleaning residues ranging from coolant, light to heavy oil, grease, drawing compounds, lubricants, waxy soil, oxidation, or rust from metals ranging from aluminum, steels, cast iron, stainless steels, alloys, brass, bronze, copper, to magnesium.*

*Offering increased life, good tramp oil rejection, low odor, low foam, and low mist, and additional corrosion protection, highly-concentrated Master STAGES spray cleaners produce clean parts while reducing overall costs.*

### Choose CLEAN IP 2019s:

- An excellent cleaner and very economical to use
- Compatible with aluminum, cast iron, and steel alloys
- Rejects oil for easy skimming or centrifuging to extend bath life
- Nonfoaming at high-pressure in a spray washer and vibratory deburring machines even at room temperature
- Provides flash corrosion inhibition and up to two weeks of short-term, dry, in-process corrosion inhibition

### CLEAN IP 2019s especially for:

**Applications** — corrosion inhibition, deburring, spray, and vibratory


**Soils** — chlorinated oils, coolant residues, oils, and sulfurized oils

**Metals** — aluminum, aluminum alloys, brass, cast iron, copper, steel alloys, steels, yellow alloys, and zinc

**Industries** — automotive and medical  
**CLEAN IP 2019s is free of** — phosphate

# Master STAGES™ CLEAN IP 2019s

## Silicated Low-foam Cleaner



### Application Guidelines

- CLEAN IP 2019s is suitable for high-pressure spray washers operating from 70°F (21°C) up to 140°F (60°C).
- Starting concentration is from 2% - 4%, depending on temperature, soil type, and time in the wash zone.
- In most cases, the washing solution should be rinsed off before it dries. This is particularly true at high concentrations.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/ap/en-ap/distributors/index.php>, your District Sales Manager, or email us at [apac-info@masterfluids.com](mailto:apac-info@masterfluids.com).


### Physical Properties Typical Data

Color (Concentrate)	Light yellow
Odor (Concentrate)	Mild
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D92-90)	> 100°C
pH (Concentrate as Range)	12.5 - 13.5
pH (Typical Operating as Range)	11.0 - 12.2
Coolant Refractometer Factor	2.6
Cleaner Conductivity Factor	0.00052
Titration Factor (CL-1 Titration Kit)	0.40
Number of Cleaner Vials (CL-1 Titration Kit)	1.0
Cleaner Indicator A or B (CL-1 Titration Kit)	A

### Recommended Metalworking Concentrations

Design Concentration Range	2.0% - 7.0%
----------------------------	-------------


### Concentration by Conductivity

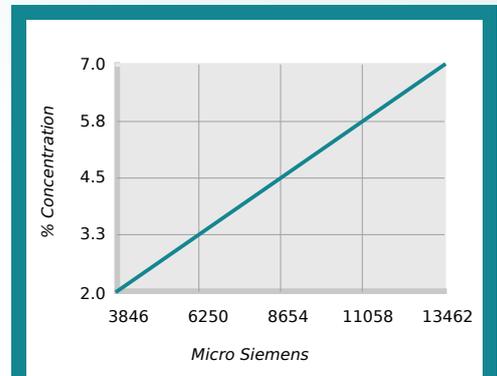

$$\% \text{ Concentration} = \text{Conductivity in Micro Siemens} \times \text{Factor}$$

$$\text{Conductivity Factor} = 0.00052$$

### Concentration by Titration

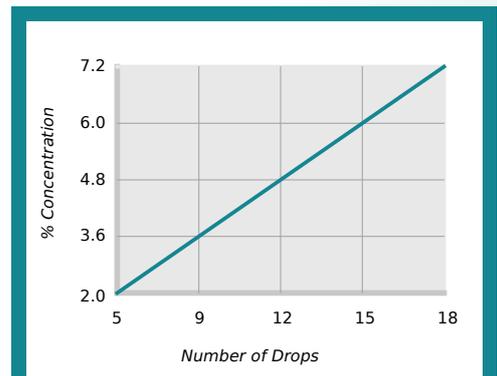

$$\% \text{ Concentration} = \text{No. of Drops} \times \text{Titration Factor}$$

$$\text{Titration Factor} = 0.40$$

### Health and Safety

Request SDS



# Master STAGES™ CLEAN IP 2019s

## Silicated Low-foam Cleaner



### Mixing Instructions

- Recommended usage concentration in water: 2.0% - 7.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.

### Ordering Information

20-liter pail

204-liter drum

Master STAGES™ CLEAN IP 2019s | ©2007-2026 Master Fluid Solutions™ | 2026-05-03

### Additional Information

- Industrial use only
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- Master STAGES™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=ap\\_en-ap\\_CLEANIP2019S](https://2trim.us/di/?i=ap_en-ap_CLEANIP2019S)



4/F, Block H, No. 200 Jinsu Road Pudong,  
Shanghai

上海市浦东新区金苏路200号H栋4楼,  
201206

China

+86 21 6807-0101, 400-801-3590

[info@masterchemical.com.cn](mailto:info@masterchemical.com.cn)

[masterfluids.com/ap/en-ap/](https://masterfluids.com/ap/en-ap/)

