TRIM™ E758

Versatile, Non-chlorinated Emulsion

TRIM E758 is a versatile, non-chlorinated multi-metal emulsion designed to deliver strong machining performance across a wide range of ferrous and non-ferrous alloys. Engineered for improved value, TRIM E758 provides excellent lubricity, long sump life, and dependable corrosion protection—making it ideal for customers seeking high performance at a more economical price point.

Emulsions



Geared up for production:

With superior lubricity and a higher oil content, TRIM emulsions provide a greater boundary layer between the tool and the material, and are ideal for heavy-duty applications such as broaching, reaming, deep hole drilling, drilling, tapping, and centerless grinding.

TRIM emulsions work well for machining copper, yellow metals, steel alloys, cast aluminums, wrought aluminums, and tough-to-machine titanium and nickel-based alloys.

Choose E758:

- Versatile multi-metal performance across both ferrous and nonferrous alloys
- Sable emulsion technology designed for long operational life and predictable performance
- Strong lubricity suitable for medium-duty machining and grinding
- Easy to maintain long fluid sump life
- Low odor and low foam

E758 especially for:

Applications — general purpose and grinding

Metals — aluminum, brass, bronze, carbon steel, die cast alloys, stainless steels, and steels

Industries — automotive and general machining

E758 is free of — chlorinated paraffin, DEA, NPEs, phenolic compounds, and sulfurized EP additives

Master Fluid SOLUTIONS™

TRIM™ E758

Versatile, Non-chlorinated Emulsion

Application Guidelines

- TRIM E758 is used at 6% or above to provide the best corrotion protection and sump life
- It is not recommended for use on reactive metals like magnesium, zirconium, or zinc
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at https://www.masterfluids.com/ap/en-ap/distributors/index.php, your District Sales Manager, or email us at apac-info@masterfluids.com.


Physical Properties Typical Data

Color (Concentrate)	Light Yellow to Amber
Color (Working Solution)	White emulsion
Odor (Concentrate)	Mild
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 100°C
pH (Typical Operating as Range)	8.8 - 9.8
Coolant Refractometer Factor	1.1

Recommended Metalworking Concentrations

Light Duty	4.0% - 6.5%
Moderate Duty	6.5% - 8.5%
Heavy Duty	8.5% - 10.0%
Design Concentration Range	4.0% - 10.0%

Concentration by % Brix

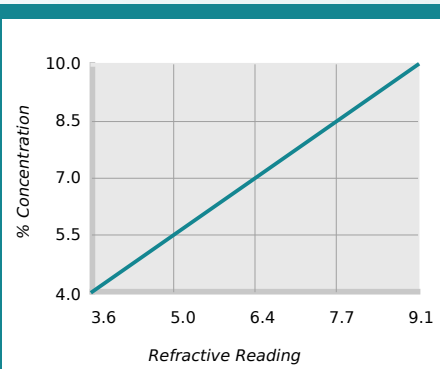

% Concentration = Refractive Reading x Refractive Factor
Coolant Refractometer Factor % Brix = 1.1

Health and Safety

Request SDS

TRIM™ E758

Versatile, Non-chlorinated Emulsion

Mixing Instructions

- Recommended usage concentration in water: 4.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: apps.masterfluids.com/makeup/.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Ordering Information

204-liter drum

1000-liter tote

Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?i=ap_en-ap_E758

B-41, Chakan MIDC Phase - 2, Village Bhambuli,
Post Vasuli, Tal. Khed, Pune -410 501.
Maharashtra,
India

india-info@masterfluids.com

masterfluids.com/ap/en-ap/