

# TRIM™ MicroSol™ 625 NXT

**PRTR Compliant Semisynthetic for Multi-metal Machining**

TRIM Microsol 625NXT is a next-generation of ester-based technology developed by Master Fluids Solution for multi-metal machining. The product is PRTR compliance with low foam property both soft and hard water. The product is professionally designed to machine for die cast aluminium and hard-to-cut alloys.

## MicroSol



### For ultimate performance:

*TRIM™ MicroSol™ semisynthetic microemulsion coolants deliver high-performance lubricity and ultimately lower costs. Achieve precision parts, exceptional tool life, extended sump life, assured regulatory compliance, and greater profitability with the MicroSol product just right for your production.*

*Designed to meet the rigorous demands of the aerospace, medical, automotive, and high production, precision parts manufacturing industries, there's a MicroSol to answer your concerns, ramp up your production, and boost your bottom line.*



### Choose MicroSol 625NXT:

- Well foam control even in soft water
- Great cleanliness and save time for maintenance
- Excellent lubricity performance and provide long-lasting toollife
- Does not contain any chemical listed under Japan PRTR regulation
- Highly compatible to diecast aluminium and alluminums alloys with excellent corrosion protection
- Improve the use of coolant and no extra biocide/fungicide for tankside treatment

### MicroSol 625NXT especially for:

**Applications** — band sawing, boring, drilling, face milling, grinding, milling, reaming, tapping, and turning

**Metals** — aluminum, aluminum alloys, brass, bronze, carbon steel, cast iron, composites, copper, die cast alloys, Inconel®, plastics, and stainless steels

**Industries** — general industry

**MicroSol 625NXT is free of** — chlorine, DEA, mineral oils, PRTR materials, and sulfur

# TRIM™ MicroSol™ 625 NXT

PRTR Compliant Semisynthetic for Multi-metal Machining



## Application Guidelines

- Running at or above 6.0% offers the best sump life and corrosion inhibition to protect machine tools and parts.
- Performs well where traditional soluble oils may not cool sufficiently.
- Not recommended for below 5% because of sump life and corrosion issue.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/ap/en-ap/distributors/index.php>, your District Sales Manager, or email us at [apac-info@masterfluids.com](mailto:apac-info@masterfluids.com).


## Physical Properties Typical Data

Color (Concentrate)	Light Yellow to Amber
Color (Working Solution)	White translucent
Odor (Concentrate)	Mild
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 100°C
pH (Concentrate as Range)	8.5 - 9.5
pH (Typical Operating as Range)	8.8 - 9.6
Coolant Refractometer Factor	1.9

## Recommended Metalworking Concentrations

Light Duty	5.0% - 6.5%
Moderate Duty	6.5% - 8.5%
Heavy Duty	8.5% - 15.0%
Design Concentration Range	5.0% - 15.0%

## Concentration by % Brix

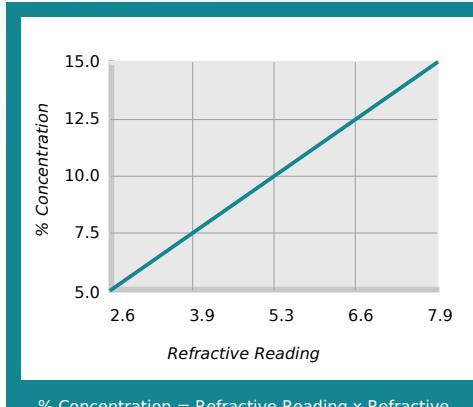

% Concentration = Refractive Reading x Refractive Factor  
Coolant Refractometer Factor % Brix = 1.9

## Health and Safety

Request SDS



# TRIM™ MicroSol™ 625 NXT

**PRTR Compliant Semisynthetic for Multi-metal Machining**



## Mixing Instructions

- Recommended usage concentration in water: 5.0% - 15.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

## Ordering Information

20-liter pail

204-liter drum

TRIM™ MicroSol™ 625 NXT | ©2025-2026 Master Fluid Solutions™ | 2026-02-01

## Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM™ and MicroSol™ are registered trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=ap\\_en-ap\\_MS625NXT](https://2trim.us/di/?i=ap_en-ap_MS625NXT)



B-41, Chakan MIDC Phase - 2, Village  
Bhambuli,  
Post Vasuli, Tal. Khed, Pune -410 501.  
Maharashtra,  
India

[india-info@masterfluids.com](mailto:india-info@masterfluids.com)

[masterfluids.com/ap/en-ap/](http://masterfluids.com/ap/en-ap/)