

# TRIM™ C116

## Low-foam synthetic

TRIM C116 is a high-performance synthetic fluid for working cast iron and mild steels. State-of-the-art technologies provide excellent cooling and chip settling, very low foam, good tramp oil rejection and machine cleanliness while leaving a protective film on the machine tool.

### Synthetics



#### Peak your performance:

TRIM® clean-running synthetics contain little to no oil. They are typically hard-water tolerant with good corrosion protection. Plus, synthetics leave very low residue for easy cleaning. Paired with extremely low carryoff, synthetics translate to less maintenance and lower operational costs, saving you time and money.

Run clean and long with TRIM synthetics.



#### Choose C116:

- Provides excellent corrosion inhibition on ferrous alloys
- Excellent biostability
- Extremely low carry off for very low total operation costs
- Very low foam and mist
- Low chemical odour
- Keeps your machines clean while leaving a soft, fluid film that protects the bare metal parts of your machine tools
- Very good tramp oil rejection

#### C116 especially for:

**Applications** — belt grinding, Blanchard grinding, cooling, cylindrical grinding, double disc grinding, drilling, form cylindrical grinding, internal grinding, plain grinding, reaming, surface grinding, surface milling, tapping and turning

**Metals** — cast iron, composites, nonferrous metals, plastics and steels

**Industries** — aerospace, automotive, compressor and job shop

C116 is free of — boron and formaldehyde releasers

# TRIM™ C116

## Low-foam synthetic



### Application Guidelines

- TRIM C116 is not recommended in machine tools that rely on the splash of the coolant to lubricate the mechanical portions of the machine tool; e.g., older screw machines, etc.
- TRIM C116 is not recommended on materials like magnesium or zirconium without special precautions.
- This product is a superior cleaning agent so it may "wash out" dirt and residues when a machine is first charged; a thorough cleaning of older machines is required when installing this product the first time.
- The minimum recommended concentration is 5% on cast iron and 4% on steel.
- Concentrations in excess of 7% provide the best corrosion inhibition, tool life and sump life.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions' Authorised Distributor at <https://www.masterfluids.com/eu/en/distributors/index.php>, your District Sales Manager, or call our Tech Line at +49 211 41 72 8 -900.


### Physical Properties Typical Data

|   |              |
|---|--------------|
| Colour (Concentrate)                    | Light yellow |
| Colour (Working Solution)               | Colorless    |
| Odour (Concentrate)                     | Mild amine   |
| Form (Concentrate)                      | Liquid       |
| Flash Point (Concentrate) (ASTM D92-90) | > 100°C      |
| pH (Concentrate as Range)               | 9.7 - 9.9    |
| pH (Typical Operating as Range)         | 9.5 - 9.7    |
| Coolant Refractometer Factor            | 3.4          |
| Digital Titration Factor                | 0.0157       |

### Recommended Metalworking Concentrations

|                            |              |
|----------------------------|--------------|
| Light Duty                 | 4.0% - 6.5%  |
| Moderate Duty              | 6.5% - 8.5%  |
| Heavy Duty                 | 8.5% - 10.0% |
| Design Concentration Range | 4.0% - 10.0% |

### Concentration by % Brix

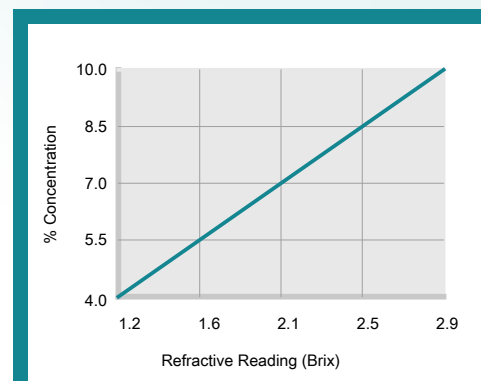

% Concentration = Refractive Reading x Refractive Factor  
Coolant Refractometer Factor % Brix = 3.4

### Health and Safety

Request SDS



# TRIM™ C116

## Low-foam synthetic



### Mixing Instructions

- Recommended usage concentration in water: 4.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

### Ordering Information

20-litre pail

204-litre drum

1000-litre IBC

TRIM™ C116 | ©2016-2025 Master Fluid Solutions™ | 2025-04-02

### Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM® is a registered trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=eu\\_en\\_C116](https://2trim.us/di/?i=eu_en_C116)



Hasselsstraße 6-14

Düsseldorf, 40597

Germany

+49 211 41 72 82 00

[info-eu@masterfluids.com](mailto:info-eu@masterfluids.com)

[masterfluids.com/eu/en/](https://masterfluids.com/eu/en/)