

TRIM[®] E709FF

Long-life Emulsion

TRIM E709FF is a high quality universal emulsion coolant concentrate. It has been designed for a very broad range of metals allowing its effective use in most cutting and grinding operations, which requires minimal maintenance even in the most demanding fluid management systems. It has the lubricity and "guts" necessary to do heavy-duty machining. The stable and predictable performance of TRIM E709FF makes it a first choice for high-quality, consistent parts manufacturing.

Soluble Oils



Geared up for production:

With superior lubricity and a higher oil content, TRIM emulsions provide a greater boundary layer between the tool and the material, and are ideal for heavy-duty applications such as broaching, reaming, deep hole drilling, drilling, tapping and centerless grinding.

TRIM emulsions work well for machining copper, yellow metals, steel alloys, cast aluminums, wrought aluminums and tough-to-machine titanium and nickel-based alloys.



Choose E709FF:

- Very stable formula provides long operational life with consistent performance
- Has a very wide application range allowing its effective use on cutting and grinding
- Extremely hard water tolerance
- Extremely stable fine particle size emulsion to reduce carry-off and super-high penetrability to get the fluid to the point of cut
- Provides good tool life and surface finishes
- High tramp oil resistance for easy oil remove, longer coolant life and more opportunities to be recycled
- Leaves a very light oily, non-gumming residue to prevent sticky ways, chucks, tool holders and fixtures
- Coolant residue is easily removed with either water, working solution or aqueous cleaners
- Good cleaning performance keeps machine tool very clean
- Easy recycling or disposal with conventional techniques and equipment
- Run effectively for long periods without the need for costly additives

E709FF especially for:

Applications — drilling, machining, milling, reaming, tapping, and turning

Metals — aluminum, brass, cast iron, and steels

Industries — automotive and job shop

E709FF is free of — formaldehyde releasers and MEA

TRIM[®] E709FF

Long-life Emulsion



Application Guidelines

- Should be run at lower concentrations for higher speed operations where heat removal is the key issue
- Higher concentrations are recommended on soft, gummy materials and for lower speed operations where friction reduction and control of B.U.E are critical
- Concentrations of 7% - 10% provide the best sump life and most predictable performance
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/in/en-in/distributors/index.php>, your District Sales Manager, or email us at india-info@masterfluids.com.


Physical Properties Typical Data

| | |
|---|----------------|
| Color (Concentrate) | Blue |
| Color (Working Solution) | Blue |
| Odor (Concentrate) | Mild, pleasant |
| Form (Concentrate) | Liquid |
| Flash Point (Concentrate) (ASTM D92-90) | > 100°C |
| pH (Concentrate as Range) | 9.0 - 10.0 |
| pH (Typical Operating as Range) | 9.0 - 10.0 |
| Coolant Refractometer Factor | 1.0 |

Recommended Metalworking Concentrations

| | |
|----------------------------|--------------|
| Light Duty | 5.0% - 7.0% |
| Moderate Duty | 7.0% - 9.0% |
| Heavy Duty | 9.0% - 12.0% |
| Design Concentration Range | 5.0% - 12.0% |

Concentration by % Brix

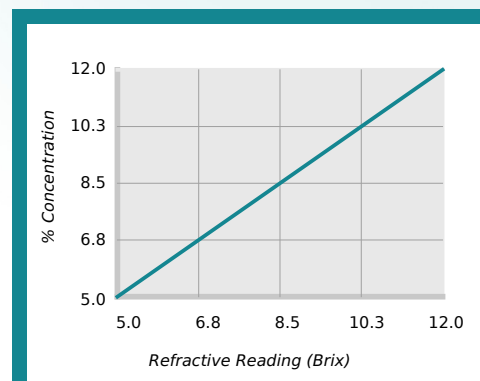

$\% \text{ Concentration} = \text{Refractive Reading} \times \text{Refractive Factor}$
Coolant Refractometer Factor % Brix = 1.0

Health and Safety

Request SDS



TRIM[®] E709FF

Long-life Emulsion



Mixing Instructions

- Recommended usage concentration in water: 5.0% - 12.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: apps.masterfluids.com/makeup/.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Ordering Information

20-litre pail

204-liter drum

1000-litre IBC

TRIM[®] E709FF | ©2021-2025 Master Fluid Solutions[®] | 2025-04-02

Additional Information

- Use Master STAGES[™] Whamex[™] for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM[™] is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES[™] and Whamex[™] are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?i=in_en-in_E709FF



B-41, Chakan MIDC Phase - 2, Village
Bhambuli,
Post Vasuli, Tal. Khed, Pune -410 501.
Maharashtra,
India

india-info@masterfluids.com

masterfluids.com/in/en-in/