


# TRIM™ E950

## High Performance Machining Emulsion

TRIM E950 is a proprietary blend of new vegetable-based technology and premium traditional lubricity additives to yield a very high performance, low management metal removal fluid. This premium emulsion product is operator friendly because of its mild contact nature and low chemical initial-charge odour. TRIM E950 is robust enough to deliver extended useful life and avoid rancid odours normally associated with traditional emulsions. The unparalleled lubricity delivers exceptional surface finish and tool life on difficult to machine aluminium alloys, inconel, titanium, stainless and high tensile strength steels.

### **Precision Parts Manufacturer Saves 40% on Cutting Fluid With TRIM® E950**

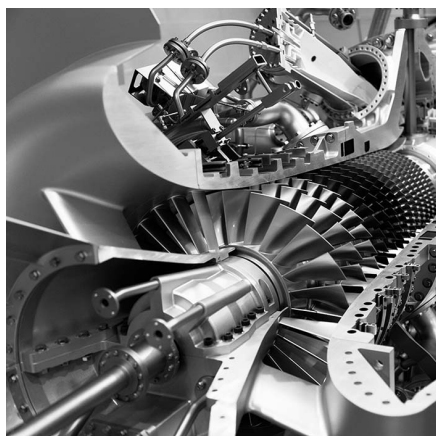

*The customer is a large-scale precision parts manufacturer that serves the aerospace and energy sectors. Their high-volume facility includes more than 40 CNC machines that carry out turning, drilling, machining, and grinding operations on challenging materials including aluminum, Inconel®, titanium, and stainless steel.*

### **Aerospace Approvals**

| Company      | Specification    |
|--------------|------------------|
| GE AVIO      | TN0989           |
| Rolls-Royce  | CSS 129, CSS 131 |
| Safran Group | PR6300 Index A   |



### **Choose E950:**

- Delivers unparalleled lubricity
- Very long sump life and low carry-off rates result in low operating cost
- Low foam even in soft water areas
- Hard water tolerant
- Non-chlorinated and non-sulphurised extreme pressure (EP) additives control built-up edge (BUE) in tough operations on aerospace materials
- Fine emulsion ensures fast wetting to get the fluid to the point of cut and fully coat the work piece and chips for superior tool life and corrosion prevention
- Compatible with all materials excluding magnesium
- Easily recycled or disposed of without special handling or equipment
- Will run effectively for long periods without the need for costly additives

### **E950 especially for:**

**Applications** — boring, broaching, deep hole drilling, down the hole work, drilling, gear cutting, heavy-duty machining center work, high-pressure, high-volume, high-speed milling, high-speed turning, honing, milling, reaming, roll threading, tapping, thread forming, thread rolling, and turning

**Metals** — cast aluminum, cast iron, copper, nickel alloys, nonferrous metals, stainless steels, steel alloys, steels, titanium, wrought aluminum, and yellow metals

**Industries** — aerospace, automotive, energy, and medical

**E950 is free of** — boron, chlorine, nitrites, phenolic compounds, sulfurized EP additives, and triazine

# TRIM™ E950

## High Performance Machining Emulsion



### Application Guidelines

- Use higher concentrations for lower speed metal cutting operations where maximum lubricity is required and lower concentrations for operations requiring more cooling.
- Running at concentrations between 7 - 10% offers the best sump life and corrosion inhibition.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/in/en-in/distributors/index.php>, your District Sales Manager, or email us at [india-info@masterfluids.com](mailto:india-info@masterfluids.com).


### Physical Properties Typical Data

|   |            |
|---|------------|
| Color (Concentrate)                     | Amber      |
| Color (Working Solution)                | Opaque     |
| Odor (Concentrate)                      | Mild Amine |
| Form (Concentrate)                      | Liquid     |
| Flash Point (Concentrate) (ASTM D93-08) | > 160°C    |
| pH (Concentrate as Range)               | 8.9 - 9.9  |
| pH (Typical Operating as Range)         | 8.8 - 9.4  |
| Coolant Refractometer Factor            | 1.0        |

### Recommended Metalworking Concentrations

|                            |               |
|----------------------------|---------------|
| Light Duty                 | 5.0% - 8.0%   |
| Moderate Duty              | 8.0% - 10.0%  |
| Heavy Duty                 | 10.0% - 15.0% |
| Design Concentration Range | 5.0% - 15.0%  |

### Concentration by % Brix

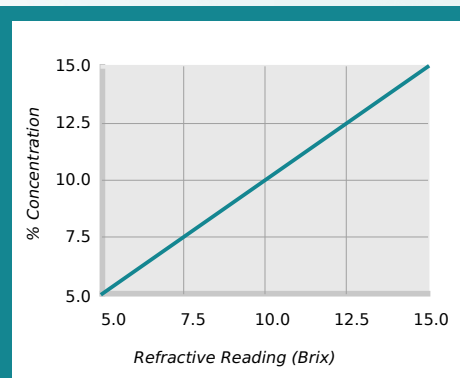

% Concentration = Refractive Reading x Refractive Factor  
Coolant Refractometer Factor % Brix = 1.0

### Health and Safety

Request SDS



# TRIM™ E950

## High Performance Machining Emulsion



### Mixing Instructions

- Recommended usage concentration in water: 5.0% - 15.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

### Ordering Information

20-litre pail

204-liter drum

1000-litre IBC

TRIM™ E950 | ©2010-2024 Master Fluid Solutions® | 2024-04-28

### Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=in\\_en-in\\_E950](https://2trim.us/di/?i=in_en-in_E950)



B-41, Chakan MIDC Phase - 2, Village  
Bhambuli,  
Post Vasuli, Tal. Khed, Pune -410 501.  
Maharashtra,  
India  
+91 2135 675961

[india-info@masterfluids.com](mailto:india-info@masterfluids.com)

[masterfluids.com/in/en-in/](https://masterfluids.com/in/en-in/)

