


# TRIM<sup>®</sup> MicroSol<sup>®</sup> 690XT

**High-lubricity, Low-foam Premium Semisynthetic**

TRIM MicroSol 690XT is a high-lubricity, semisynthetic, microemulsion coolant. The formula delivers extended sump life and better foam control versus previous generation semisynthetics. It provides excellent cooling and mechanical lubricity, along with the machine friendly characteristics you expect from a premium TRIM coolant. It does very well in mixed metal situations and is compatible with a very wide range of materials including titanium, high nickel alloys, steels, copper, and aluminum alloys.

***Wilson Tool Finds the Formula for Worker Health & Safety with Master Fluid Solutions<sup>®</sup>***

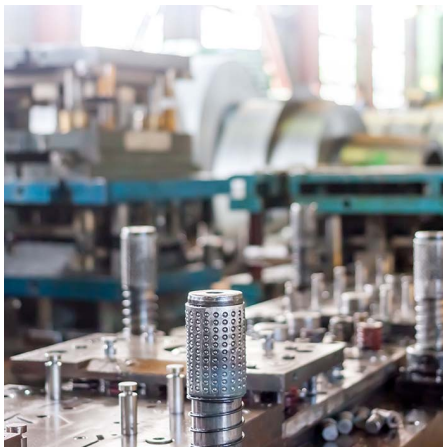

*Global custom tooling company Wilson Tool International provides a complete line of tooling products for the additive, tableting, stamping, bending, and punching industries. From the louvers on the back of a microwave to the back panel of a computer server, if a company needs something to stamp out different forms, Wilson Tool likely makes it.*

## Aerospace Approvals

Company	Specification
Fokker	No specification available
GE Aerospace	SDS# EVEN-12659
Lockheed Martin/Sikorsky	864-009
Northrop Grumman	No specification available
Raytheon Technologies/Collins Aerospace/Pratt & Whitney	PMC 9293
Rolls-Royce	No specification available
Safran Group	PCS-4001/4002, PR6300



## Choose MicroSol 690XT:

- Dramatically extends useful life without the need for tank-side biocides or fungicides
- Boron and halogen free
- Low foaming for today's demanding high-pressure, high-volume applications
- Compatible with a very wide range of materials including titanium, high nickel alloys, steels, copper, and aluminum alloys
- Excellent alternative to chlorinated soluble oils on high-silica aluminum alloys
- Contains no nitrites, triazines, phenols, chlorinated, or sulfurized EP additives
- Provides superior corrosion inhibition on all ferrous and nonferrous metals
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Uses standard metalworking recycling and disposal techniques

## MicroSol 690XT especially for:

**Applications** — band sawing, cylindrical form grinding, drilling, grinding, high-pressure, high-volume, internal grinding, plain grinding, reaming, roll threading, surface grinding, surface milling, tapping, thread forming, through-feed centerless grinding, and turning

**Metals** — 6000 series aluminum, aerospace aluminum alloys, aluminum alloys, brass, bronze, cast aluminum, cast iron, composites, copper, copper alloys, exotic alloys, glass, heat-treated steel, high-carbon steel, high-nickel alloys, high-silica aluminum alloys, nonferrous metals, plastics, stainless steels, steels, titanium, and wrought aluminum

**Industries** — aerospace, automotive, bearing, compressor, diecast, energy, firearms, green, job shop, machine tool, and medical

**MicroSol 690XT is free of** — boron, chlorinated EP additives, formaldehyde releasers, halogens, nitrites, phenols, and sulfurized EP additives

# TRIM<sup>®</sup> MicroSol<sup>®</sup> 690XT

**High-lubricity, Low-foam Premium Semisynthetic**



## Application Guidelines

- MicroSol 690XT performs well where traditional soluble oils may not cool sufficiently.
- In mixed-metal situations, concentration control is critical to fight galvanic corrosion (7.5% plus).
- Running at or above 7.5% offers the best sump life and corrosion inhibition on cast iron chips.
- Please use safe handling precautions including proper ventilation when machining reactive materials such as magnesium.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/na/en-us/distributors/index.php>, your District Sales Manager, or call our Tech Line at 1-800-537-3365.


## Physical Properties Typical Data

Color (Concentrate)	Amber
Color (Working Solution)	White microemulsion
Odor (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 219°F
pH (Concentrate as Range)	9.8 - 10.1
pH (Typical Operating as Range)	8.8 - 9.6
Coolant Refractometer Factor	1.2
Titration Factor (CGF-1 Titration Kit)	0.75
Digital Titration Factor	0.0164
V.O.C. Content (ASTM E1868-10)	92 g/l


## Recommended Metalworking Concentrations

Light Duty	5.0% - 6.5%
Moderate Duty	6.5% - 8.5%
Heavy Duty	8.5% - 10.0%
Design Concentration Range	5.0% - 10.0%

## Concentration by % Brix

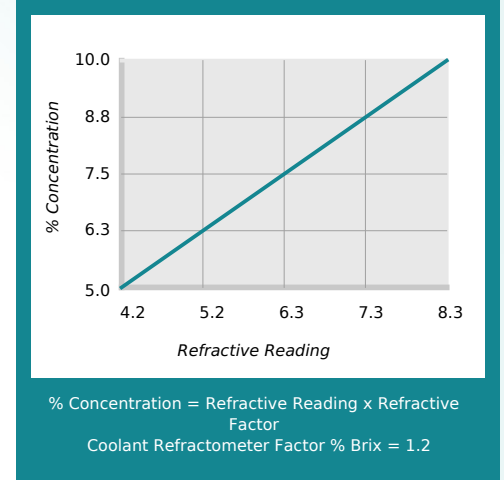

## Concentration by Titration

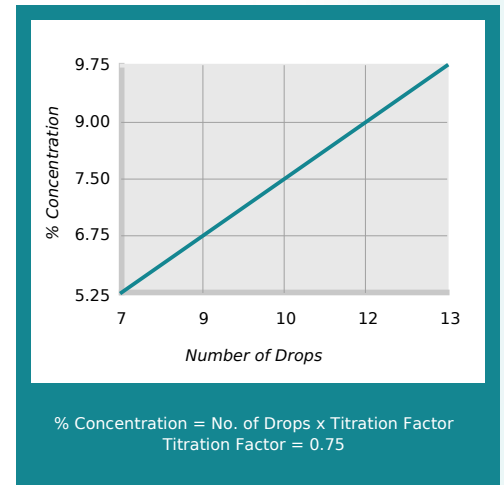

## Health and Safety

Request SDS



# TRIM<sup>®</sup> MicroSol<sup>®</sup> 690XT

*High-lubricity, Low-foam Premium Semisynthetic*



## Mixing Instructions

- Recommended usage concentration in water: 5.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.



1-gallon jug  
SKU: MS690XT-1G  
UPC-12: 641238072973



5-gallon pail  
SKU: MS690XT-5G  
UPC-12: 641238072997



54-gallon drum  
SKU: MS690XT-54G  
UPC-12: 641238073000



270-gallon tote  
SKU: MS690XT-270G  
UPC-12: 641238073017

TRIM<sup>®</sup> MicroSol<sup>®</sup> 690XT | ©2014-2025 Master Fluid Solutions<sup>®</sup> | 2025-04-02

## Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM<sup>®</sup> and MicroSol<sup>®</sup> are registered trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=na\\_en-us\\_MS690XT](https://2trim.us/di/?i=na_en-us_MS690XT)



501 West Boundary Street  
Perrysburg, OH 43551-1200  
United States  
+1 419-874-7902

[info@masterfluids.com](mailto:info@masterfluids.com)

[masterfluids.com/na/en-us/](https://masterfluids.com/na/en-us/)

