

TRIM™ C290

Economical Synthetic Fluid for Aluminum Machining



TRIM C290 is a synthetic metalworking fluid optimized for the chemical, environmental, and machining requirements of general aluminum parts. C290 is a high performance, easy to use and maintain, metal removal fluid with very high levels of usable lubricity at the point-of-cut. C290's unique chemical formula allows great, nonferrous corrosion prevention on most aluminum alloys.

Synthetics



Peak your performance:

TRIM™ clean-running synthetics contain little to no oil. They are typically hard-water tolerant with good corrosion protection. Plus, synthetics leave very low residue for easy cleaning. Paired with extremely low carryoff, synthetics translate to less maintenance and lower operational costs, saving you time and money.

Run clean and long with TRIM synthetics.

Choose C290:

- Great resistance to corrosion on nonferrous materials including aerospace aluminums 6061, 7075, 2024, 3000
- Water-clear, low-foaming and -misting, C290 is a joy to work with and manage
- Provides good results in a wide range of grinding and machining operations
- Excellent tramp oil rejection
- Easily removed from parts for easy cleanup before assembly, painting, or plating operations
- PRTR compliant, no SARA 313 reportable chemistry. Product contains no chlorine, phenol, nitrites, copper, triazine, or silicone
- Very low carryoff and long sump life results in low operating cost

C290 especially for:

Applications — belt grinding, Blanchard grinding, creep-feed grinding, cutting, cylindrical grinding, double disc grinding, drilling, form cylindrical grinding, grinding, in-feed centerless grinding, internal grinding, plain grinding, surface grinding, surface milling, tapping, through-feed centerless grinding, and turning

Metals — 2024, 5000, 6000, 7075, aerospace aluminum alloys, brass, bronze, cast aluminum, composites, copper, glass, high-nickel alloys, high-strength alloy steels, Inconel®, nonferrous metals, plastics, stainless steels, titanium, wrought aluminum, and yellow metals

Industries — general industry

C290 is free of — chlorine, formaldehyde releasers, nitrites, phenols, PRTR materials, SARA 313 listed ingredients, silicone, and sulfur

TRIM™ C290

Economical Synthetic Fluid for Aluminum Machining



Application Guidelines

- Higher concentrations of C290 increase both boundary and EP lubrication.
- Very low foam at working temperatures above 80°F (27°C).
- Maintaining concentration from 7,5% to 10,0% provides the best sump life and corrosion inhibition.
- C290 is not recommended on cast irons.
- C290 should not be used on magnesium or other reactive metals without special precautions.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/vnm/en-vnm/distributors/index.php>, your District Sales Manager, or email us at info@masterfluids.com.


Physical Properties Typical Data

Color (Concentrate)	Clear light yellow
Color (Working Solution)	Translucent
Odor (Concentrate)	Mild
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 100°C
pH (Concentrate as Range)	7,8 - 8,4
pH (Typical Operating as Range)	7,3 - 8,1
Coolant Refractometer Factor	2,4

Recommended Metalworking Concentrations

Light Duty	6,0% - 7,0%
Moderate Duty	7,0% - 9,0%
Heavy Duty	9,0% - 10,0%
Design Concentration Range	6,0% - 10,0%

Concentration by % Brix

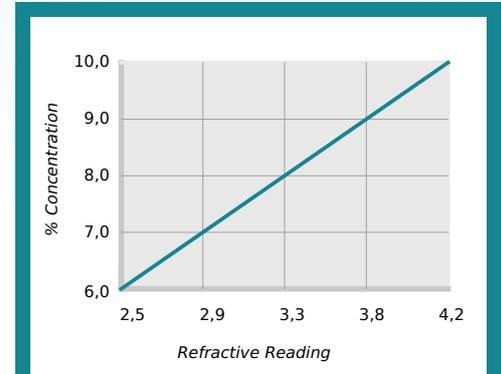

$\% \text{ Concentration} = \text{Refractive Reading} \times \text{Refractive Factor}$
Coolant Refractometer Factor % Brix = 2,4

Health and Safety

Request SDS



TRIM™ C290

Economical Synthetic Fluid for Aluminum Machining



Mixing Instructions

- Recommended usage concentration in water: 6,0% - 10,0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: apps.masterfluids.com/makeup/.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Ordering Information

20-liter pail

204-liter drum

TRIM™ C290 | ©2023-2026 Master Fluid Solutions™ | 2026-04-30

Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?i=vnm_en-vnm_C290



17th Floor, VCCI Tower, 9 Dao Duy Anh Street, Phuong Mai Ward, Dong Da District

Hanoi City, 115500

Vietnam

+84 24-3512-3436

vietnam-info@masterfluids.com

masterfluids.com/vnm/en-vnm/